



F SERIES

STATIONARY PULVERIZER

- FRANTUMATORE SECONDARIO
- BROYEUR HYDRAULIQUE
- DEMOLEDOR SECUNDARIO
- STARRE PULVERISIERER



- (1) Optimum excavator-equipment combination**
 Accoppiamento escavatore-attrezzatura ottimale
 Couplage pelle-équipement optimal
 Acoplamiento excavadora-implemento optimal
 Optimale Bagger-Ausrüstung Kombination
- (2) Possible excavator-equipment combination**
 Accoppiamento escavatore-attrezzatura possibile
 Couplage pelle-équipement possible
 Acoplamiento excavadora-implemento posible
 Mögliche Bagger-Ausrüstung Kombination

NEW PRODUCT

NEW PRODUCT

		F 04	F 07RD	F 12RD	F 14RRD*	F 18RD	F 20RRD*	F 25RD	F 29RRD*	F 30RD	F 35RRD*	F 45RD	F 70RD
	kg	460	680	1250	1530	1990	2405	2650	3310	3070	3720	4490	6430
A	mm.	465	530	730	730	825	825	870	870	950	950	1130	1250
B	mm.	1475	1345	1600	2150	1845	2215	1955	2350	2100	245C	2415	2670
C	mm.	305	365	460	460	540	540	670	670	670	670	760	800
	mm.	140	140	220	220	260	260	260	260	260	260	260	325
X	t.	101	117	187	187	255	255	298	298	339	339	420	469
Y	t.	33	45	80	80	101	101	122	122	131	131	140	194
∅ max	mm.	20	25	30	30	40	40	45	45	50	50	60	75
	bar	320	320	350	350	350	350	350	350	350	350	350	350
	l/min.	80 / 150	80 / 150	120 / 200	120 / 200	200 / 300	200 / 300	250 / 350	250 / 350	300 / 400	300 / 400	350 / 450	450 / 600
	bar	/	/	/	140	/	140	/	140	/	140	/	/
	l/min.	/	/	/	10 / 20**	/	20 / 40**	/	25 / 50**	/	25 / 50**	/	/



*Model equipped with continuous hydraulic 360° rotation / *Modello fornito con rotazione idraulica continua a 360° / *Modèle équipé de rotation hydraulique à 360° en continu
 *Modelo entregado con rotación hidráulica continua a 360° / *Modell ausgestattet mit hydraulischer kontinuierliche 360° Drehvorrichtung
 **Double motor / **Doppio motore / **Double moteur / **Doble motor / **Doppelmotor



F SERIES

STATIONARY PULVERIZER with magnet

- FRANTUMATORE SECONDARIO CON MAGNETE
- BROYEUR HYDRAULIQUE AVEC AIMANT
- DEMOLEDOR SECUNDARIO CON IMÁN
- STARRE PULVERISIERER MIT MAGNET

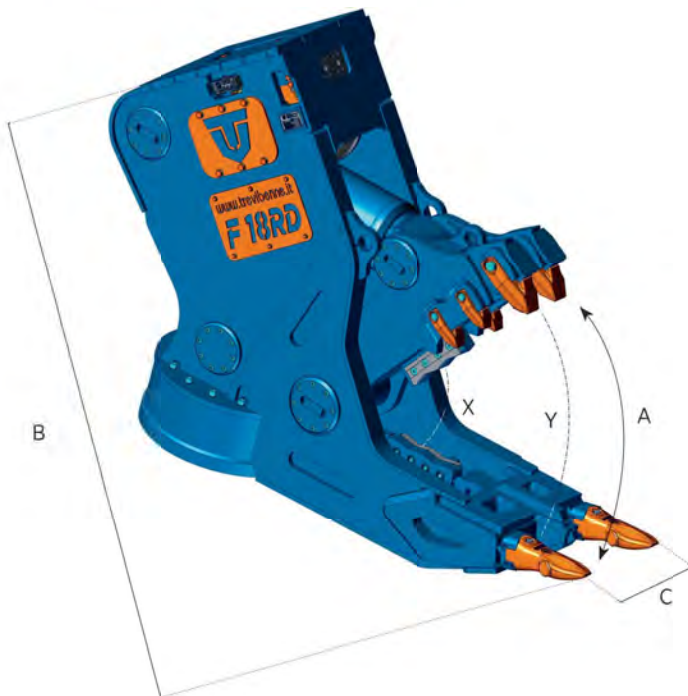

- (1) Optimum excavator-equipment combination
Accoppiamento escavatore-attrezzatura ottimale
Couplage pelle-équipement optimal
Acoplamiento excavadora-implimento optimal
Optimale Bagger-Ausrüstung Kombination
- (2) Possible excavator-equipment combination
Accoppiamento escavatore-attrezzatura possibile
Couplage pelle-équipement possible
Acoplamiento excavadora-implimento posible
Mögliche Bagger-Ausrüstung Kombination

		F 18RDM	F 25RDM	F 30RDM
	kg.	2500	3300	3900
\varnothing	mm.	660	770	770
A	mm.	825	870	950
B	mm.	1845	1955	2100
C	mm.	540	670	740
	mm.	260	260	260
X	t.	255	298	339
Y	t.	101	122	131
\varnothing max	mm.	40	45	50
\varnothing	bar	350	350	350
	l/min.	200 / 300	250 / 350	300 / 400
\varnothing	bar	/	/	/
	l/min.	/	/	/



HARDOX®
WEAR PLATE



HARDOX®
IN MY BODY